



WATERPROOF TELEPHONE

Product Model: JWAT910

Defend Grade: IP66

Communication System: IP

Material: Aluminum alloy

Color: Yellow (customized)



Technical Parameters

Signal Voltage	PoE, 12V DC or 220VAC
Standby Work Current	≤0.2A
Frequency Response	250~3000 Hz
Ringer Volume	≤80dB(A)
Corrosion Grade	WF1
Ambient Temperature	-40~+70°C
Atmospheric Pressure	80~110KPa
Relative Humidity	≤95%
Lead Hole	3-PG11
Installation	Wall-mounted



Application

This Weatherproof Telephone Is Very Popular For Tunnels, Mining, Marine, Underground, Metro Stations, Railway Platform, Highway Side, Hotels, Parking Lots, Steel Plants, Chemical Plants, Power Plants And Related Heavy Duty Industrial Application, Etc.






Features

1. Aluminum alloy die-casting shell, high mechanical strength and strong impact resistance.
2. Heavy Duty handset with hearing Aid compatible receiver, Noise canceling microphone.
3. Stainless Steel Illuminated Keypad, buttons can be programmed as speed dial button.
4. Support 2 lines SIP, SIP 2.0 (RFC3261).
5. Audio Codes:G.711, G.722, G.729.
6. IP Protocols:IPv4, TCP, UDP, TFTP, RTP, RTCP, DHCP, SIP.
7. Echo cancellation code:G.167/G.168.
8. Supports full duplex.
9. WAN/LAN: support Bridge mode.
10. Support DHCP get IP on WAN port.
11. Support PPPoE for xDSL.
12. Support DHCP get IP on WAN port.
13. Temperature: Operating: -30°C to +65°C Storing: -40°C to +75°C.
14. Weather proof protection to IP66-IP67.
15. Wall mounted, Simple installation.
16. Multiple housings and colors.
17. Self-made telephone spare part available.
18. CE, FCC, RoHS, ISO9001 compliant

Product Dimensions

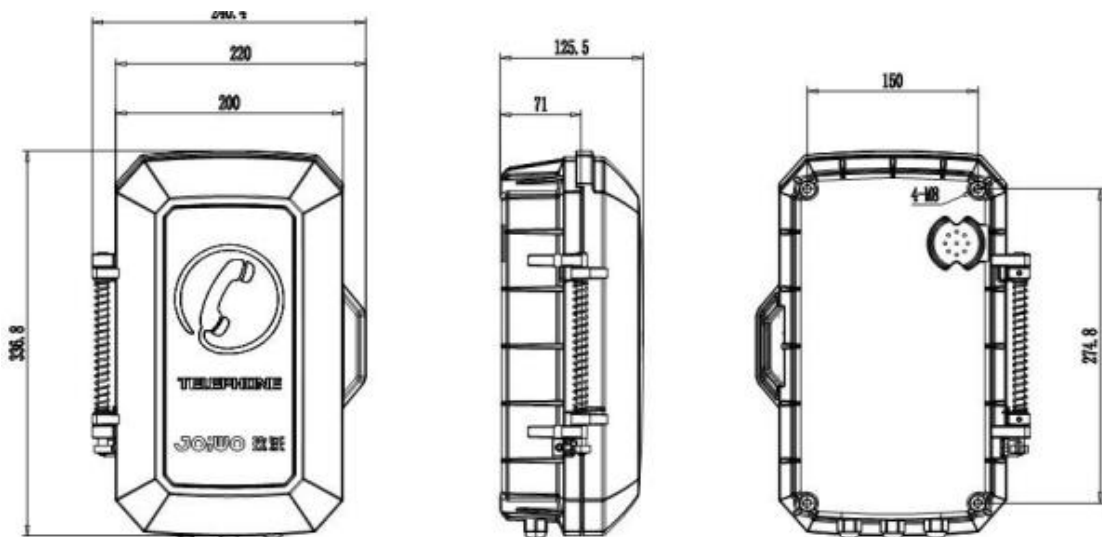



Package

Unit size: 339*246*126 (mm)

Carton size: 200*300*440 (mm)

Packaging materials: Pearl cotton, Carton

Net weight: 6 KG

Gross weight: 7 KG



Service and Support

Under normal use, non-human damage, free **THREE YEAR WARRANTY**.

