



## CLEAN ROOM EXPLOSION PROOF TELEPHONE

Product Model: JWBT812

Defend Grade: IP65

Communication System: Analogue

Material: Stainless Steel

Color: Stainless Steel (customized)



### Technical Parameters

Explosion-proof mark	ExdibIICT6Gb/EXtDA21IP66T80°C
Power Supply	Telephone Line Powered
Voltage	AC220 V
Standby Work Current	≤0.2A
Frequency Response	250~3000 Hz
Ringer Volume	≥80dB(A)
Corrosion Grade	WF2
Ambient Temperature	-30~+60°C
Atmospheric Pressure	80~110KPa
Relative Humidity	≤95%
Lead Hole	2-G3/4"
Installation	Embedded



### Application


1. Suitable for explosive gas atmospheres Zone 1 and Zone 2.
2. Suitable for IIA, IIB explosive atmosphere.
3. Suitable for dust Zone 20, Zone 21 and Zone 22.
4. Suitable for temperature class T1 ~ T6.
5. Chemical factory pharmaceutical factory clean room, elevator, clean room factory workshop etc.



## Features

1. Standard analogue phone, Phone line powered. Also available in SIP/VoIP, GSM/3G version.
2. Robust housing, constructed of 304 stainless steel material.
3. Hands-free Operation.
4. Vandal resistant stainless steel keypad.
5. Flush Mounting.
6. Weather proof protection IP54.
7. Connection: RJ11 screw terminal pair cable.
8. Self-made telephone spare part available.
9. CE, FCC, RoHS, ISO9001 compliant.

## Product Dimensions

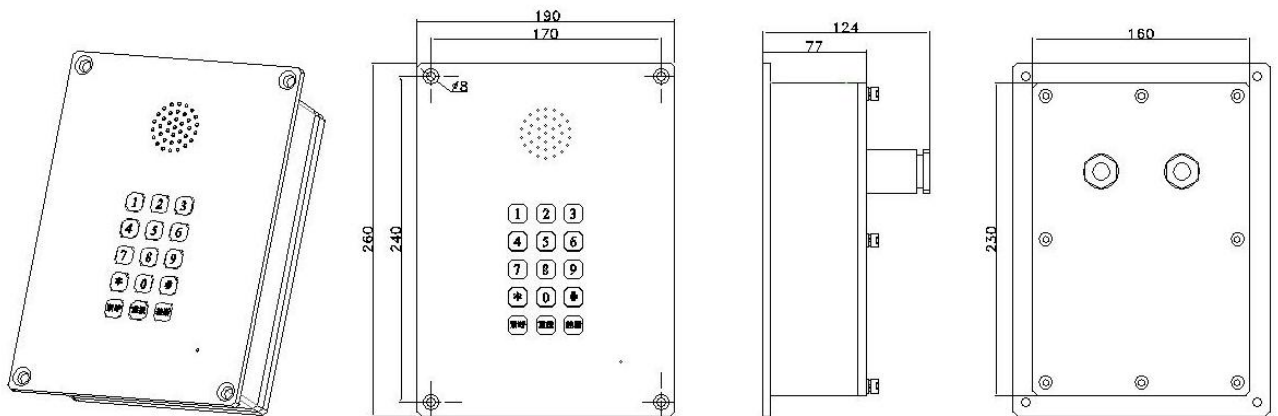

## Package

Unit size: 260×190×124 (mm)

Carton size: 440\*320\*270 (mm)

Packaging materials: Pearl cotton, Carton

Net weight: 6 KG

Gross weight: 6.5 KG



## Service and Support

Under normal use, non-human damage, free **THREE YEAR WARRANTY**.



86-574-58223619



Sales@joiwo.com



<https://www.joiwo.com>



No. 8 Middle Road Guoxiang Bridge Lanjiang Street Yuyao Zhejiang China