



HANDSFREE TELEPHONE

Product Model: JWAT411

Defend Grade: IP54

Communication System: Analogue/IP

Material: Stainless Steel

Color: Stainless Steel (Optional)

Technical Parameters



Voltage	DC5V/1A
Standby Work Current	≤300MA
Frequency Response	250~3000 Hz
Ringer Level	≥85dB(A)
Corrosion Grade	WF2
Ambient Temperature	-20~+60℃
Atmospheric Pressure	80~110KPa
Relative Humidity	≤95%
Lead Hole	1-Ø10
Installation	Embedded



Application

The Hands-free Telephone usually used in elevators, pharmaceutical factories, building intercoms and other environments with special requirements




Features

1. DECG chip, with more outstanding sound, stronger anti-interference ability, digital automatic gain, no howling or intermittent call in the hands-free state..
2. Robust housing, constructed of 304 stainless steel material.
3. Hands-free emergency phone.
4. Vandal resistant stainless steel keypad.
5. Connection: RJ11 screw terminal pair cable.
6. Self-made telephone spare part available.
7. CE, FCC, RoHS, ISO9001 compliant.



Product Dimensions

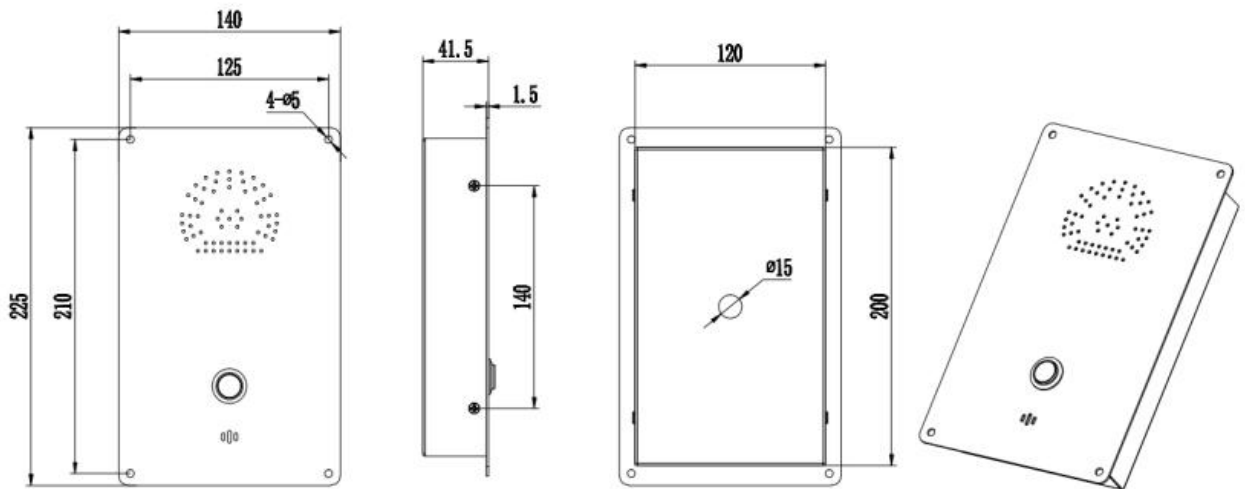

Package

Carton size:440*320*270 (mm)

Packaging materials: Pearl cotton, Carton

Net weight: 1.5KG

Gross weight: 1.8KG



Service and Support

Under normal use, non-human damage, free **THREE YEAR WARRANTY**.