



EXPLOSION PROOF TELEPHONE

Product Model: JWBT810

Defend Grade:IP66

Communication System: Analogue

Material: Aluminum alloy

Color: Yellow (customized)



Technical Parameters

Explosion-proof mark	ExdibIICT6Gb/ExIxDA21IP66T80°C
Power Supply	Telephone Line Powered
Voltage	24--65 VDC
Standby Work Current	≤0.2A
Frequency Response	250~3000 Hz
Ringer Volume	≤80dB(A)
Amplified Output Power	10~25W
Corrosion Grade	WF1
Ambient Temperature	-40~+60°C
Atmospheric Pressure	80~110KPa
Relative Humidity	≤95%
Lead Hole	3-G3/4"
Installation	Wall-mounted



Application

1. Suitable for explosive gas atmospheres Zone 1 and Zone 2.
2. Suitable for IIA, IIB,IIC explosive atmosphere.
3. Suitable for dust Zone 20, Zone 21 and Zone 22.
4. Suitable for temperature class T1 ~ T6.
5. Hazardous dust and gas atmospheres, petrochemical industry, Tunnel, metro, railway, LRT, speedway, marine, ship, offshore, mine, power plant, bridge etc.






Features

1. Standard analogue phone, Phone line powered. Also available in SIP/VoIP, GSM/3G version
2. Aluminum alloy die-casting shell, high mechanical strength and strong impact resistance.
3. Heavy Duty handset with hearing Aid compatible receiver, Noise canceling microphone.
4. Zinc alloy keypad and Magnetic reed hook-switch.
5. Weather proof protection to IP66-IP67.
6. Temperature range from -40 degree to +70 degree.
7. Powder coated in UV stabilized polyester finish.
8. Wall mounted, Simple installation.
9. Multiple housings and colors.
10. Self-made telephone spare part available.
11. CE, FCC, RoHS, ISO9001 compliant

Product Dimensions

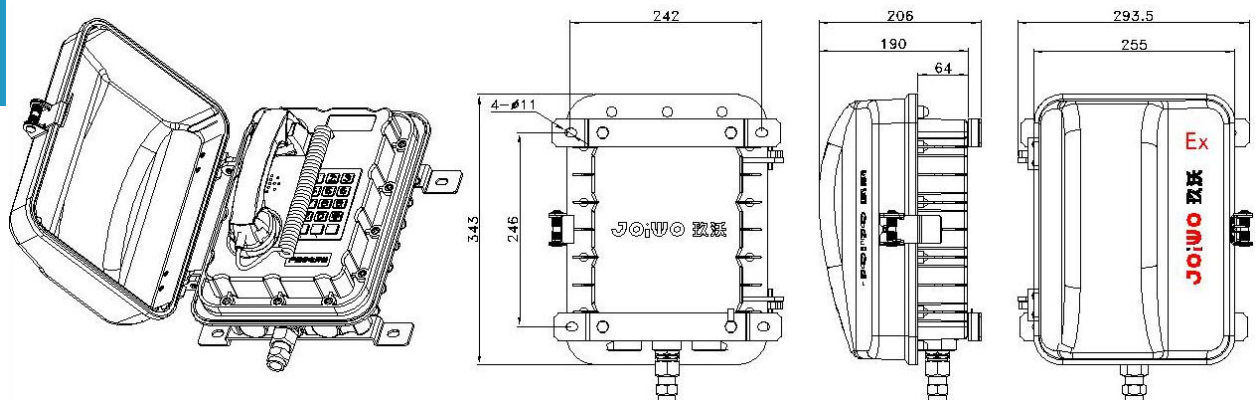

Package

Unit size: 343×294×206 (mm)

Carton size: 440×320×270 (mm)

Packaging materials: Pearl cotton, Carton

Net weight: 10 KG

Gross weight: 10.5 KG



Service and Support

Under normal use, non-human damage, free **THREE YEAR WARRANTY**.