



EXPLOSION PROOF TELEPHONE

Product Model: JWBT811

Defend Grade: IP66

Communication System: Analogue

Material: Aluminum alloy

Color: Yellow (customized)



Technical Parameters

Explosion-proof mark	ExdibIICT6Gb/EXtDA21IP66T80°C
Signal Voltage	100-230VAC
Standby Work Current	≤0.2A
Frequency Response	250~3000 Hz
Ringer Volume	≤80dB(A)
Amplified Output Power	10~25W
Corrosion Grade	WF1
Ambient Temperature	-40~+60°C
Atmospheric Pressure	80~110KPa
Relative Humidity	≤95%
Lead Hole	3-G3/4"
Installation	Wall-mounted



Application

1. Suitable for explosive gas atmospheres Zone 1 and Zone 2.
2. Suitable for IIA, IIB explosive atmosphere.
3. Suitable for dust Zone 20, Zone 21 and Zone 22.
4. Suitable for temperature class T1 ~ T6.
5. Hazardous dust and gas atmospheres, petrochemical industry, Tunnel, metro, railway, LRT, speedway, marine, ship, offshore, mine, power plant, bridge etc.




Features

1. Standard analogue phone, Phone line powered. Also available in SIP/VoIP, GSM/3G version
2. Aluminum alloy die-casting shell, high mechanical strength and strong impact resistance.
3. Heavy Duty handset with hearing Aid compatible receiver, Noise canceling microphone.
4. Zinc alloy keypad and Magnetic reed hook-switch.
5. Weather proof protection to IP66-IP67.
6. With loudspeaker and flash light.
7. Temperature range from -40 degree to +70 degree.
8. Powder coated in UV stabilized polyester finish.
9. Wall mounted, Simple installation.
10. Multiple housings and colors.
11. Self-made telephone spare part available.
12. CE, FCC, RoHS, ISO9001 compliant.



Product Dimensions

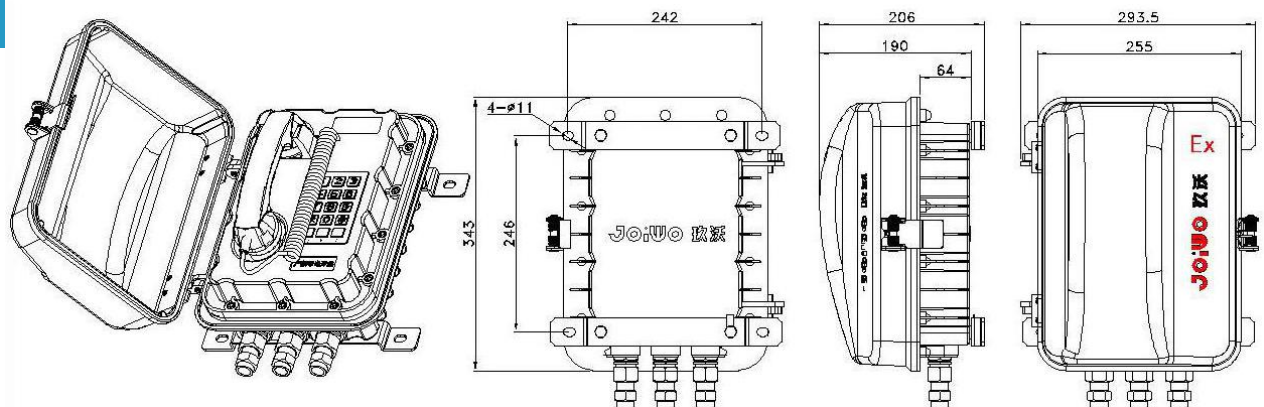

Package

- Unit size: 343×294×206 (mm)
Carton size: 440×320×270 (mm)
Packaging materials: Pearl cotton, Carton
Net weight: 11 KG
Gross weight: 11.5 KG



Service and Support

Under normal use, non-human damage, free **THREE YEAR WARRANTY**.