



INTERCOM PHONE

Product Model: JWAT407

Defend Grade: IP66

Communication System: Analogue

Material: Aluminium Alloy

Color: Orange (Optional)



Technical Parameters

Power Supply	Telephone Line Powered
Voltage	DC48V, with external power of 200V
Standby Work Current	≤1mA
Frequency Response	250~3000 Hz
Ringer Volume	≤90dB(A)
Corrosion Grade	WF1
Ambient Temperature	-40~+70°C
Atmospheric Pressure	80~110KPa
Relative Humidity	≤95%
Anti-vandalism Level	IK9
Installation	Wall-mounted



Application

The weatherproof intercom phone is usually used for Tunnels, Mining, Marine, Underground, Metro stations, Railway platform, Highway side, Hotels, Parking lots, Steel Plants, Chemical plants, Power plants and related heavy duty industrial application, etc.






Features

1. Standard Analogue phone. SIP version available.
2. Robust housing, Aluminum alloy die-casting body.
3. Rolled steel face-plate with epoxy powder coated providing complete protection against dust and moisture.
4. Vandal resistant stainless buttons.
5. All weather protection IP66-67.
6. One button for speed dial.
7. Horn & Lamp on the top is available.
8. With external power supply, sound level is more than 80db.
9. Hands-free Operation.
10. Wall mounted.
11. Self-made telephone spare part available.
12. CE, FCC, RoHS, ISO9001 compliant



Product Dimensions

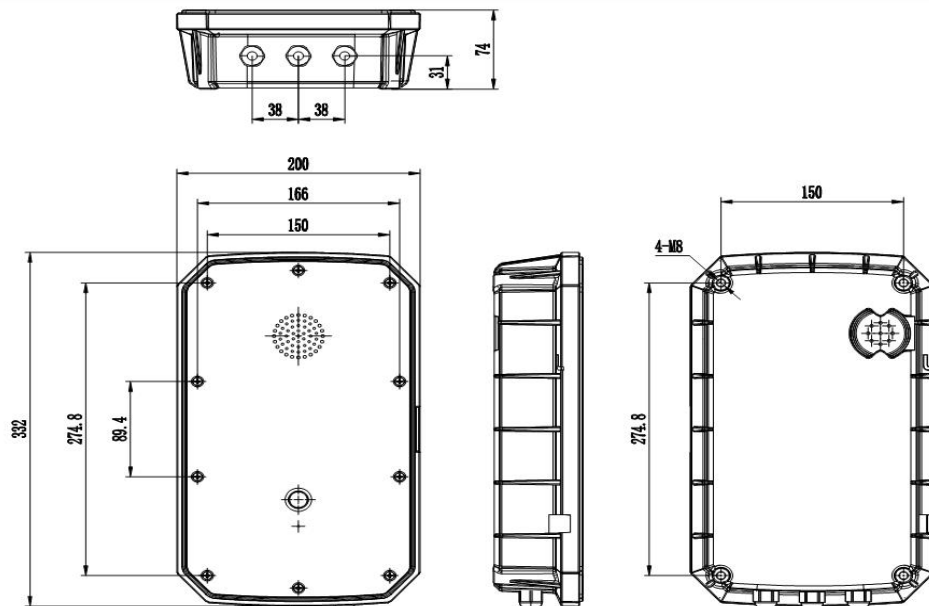

Package

Unit size: 200*332*74(mm)

Carton size: 440*320*270 (mm)

Packaging materials: Pearl cotton, Carton

Net weight: 3.5 KG

Gross weight: 3.6 KG



Service and Support

Under normal use, non-human damage, free **THREE YEAR WARRANTY**.