



VANDAL RESISTANT PHONE

Product Model: JWAT906

Defend Grade:IP65

Communication System:IP

Material: Stainless Steel 304

Color: stainless steel (Optional)



Technical Parameters

Voltage	DC48V
Standby Work Current	≤1mA
Frequency Response	250~3000 Hz
Ringer Volume	≤80dB(A)
Corrosion Grade	WF1
Ambient Temperature	-30~+70℃
Atmospheric Pressure	80~110KPa
Relative Humidity	≤95%
Lead Hole	1-Ø5
Weight	3.5kg
Installation	Wall-mounted

Application



The stainless steel phone can be used in a variety of applications such as in jails, bank, labor camps, detoxification centers, Correctional Institute, hospitals, dormitories, airports, control rooms and other internal intercoms communications, etc. that need to be monitored.




Features

1. Direct access to Ethernet, cross-network segment and cross-route
2. Broadcast shouting to the area where authority is allowed Zinc alloy keypad with volume control button.
3. Zinc alloy keypad with 3 DSS speed dial function keys which can set different functions according to your needs.
4. 304 stainless steel material shell, high mechanical strength and strong impact resistance.
5. The design of the phone housing have waterproof and dustproof grade IP65 , no need waterproof cover.
6. The internal circuit of the telephone adopts international universal double-sided integrated circuit, which has the advantages of accurate number sending, clear communication and stable operation.
7. Optional noise-canceling microphone available
8. Magnetic hook switch with reed switch.
9. Wall mounted, Simple installation.
10. Connection: RJ11 screw terminal pair cable.
11. Multiple color available.
12. Self-made telephone spare part available.
13. CE, FCC, RoHS, ISO9001 compliant



Product Dimensions

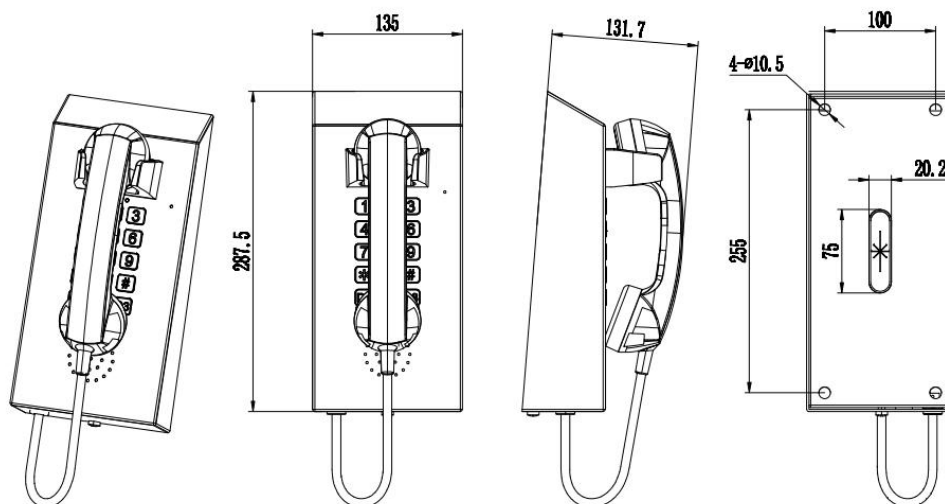

Package

Unit size: 287.5*136.5*75 (mm)

Carton size: 530*350*350 (mm)

Packaging materials: Pearl cotton, Carton

Net weight: 3.5KG

Gross weight: 4 KG



Service and Support

Under normal use, non-human damage, free **THREE YEAR WARRANTY**.