



VANDAL RESISTANT PHONE

Product Model: JWAT139

Defend Grade: IP65

Communication System: Analogue

Material: Stainless Steel 304

Color: stainless steel (Optional)



Technical Parameters

Power Supply	Telephone Line Powered
Voltage	DC48V
Standby Work Current	≤1mA
Frequency Response	250~3000 Hz
Ringer Volume	≤80dB(A)
Corrosion Grade	WF1
Ambient Temperature	-40~+70°C
Atmospheric Pressure	80~110KPa
Relative Humidity	≤95%
Anti-vandalism Level	IK10
Installation	Wall-mounted



Application

The stainless steel phone can be used in a variety of applications such as in jails, hospitals, oil rigs, platforms, dormitories, airports, control rooms, sally ports, schools, plant, gate and entryways, PREA phone, or waiting rooms etc.




Features

1. Standard Analogue phone. Phone line powered.
2. 304 stainless steel material shell, high mechanical strength and strong impact resistance.
3. Vandal resistant handset with Internal steel lanyard and grommet provides added security for handset cord.
4. Panel have two button: One is for volume control button, the other is for auto dial function button.
5. Magnetic hook switch with reed switch.
6. Optional noise-canceling microphone available
7. Wall mounted, Simple installation.
8. Weather proof protection IP65.
9. Connection: RJ11 screw terminal pair cable.
10. Multiple color available.
11. Self-made telephone spare part available.
12. CE, FCC, RoHS, ISO9001 compliant



Product Dimensions

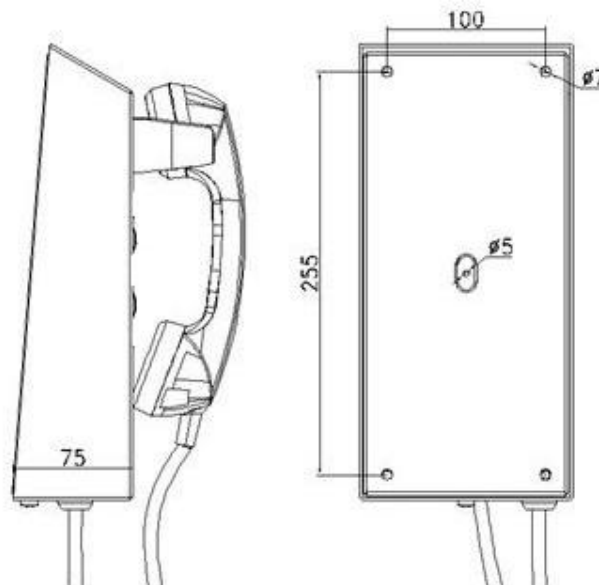

Package

- Unit size: 287.5*136.5*75 (mm)
Carton size: 530*350*350 (mm)
Packaging materials: Pearl cotton, Carton
Net weight: 3 KG
Gross weight: 3.5 KG



Service and Support

Under normal use, non-human damage, free **THREE YEAR WARRANTY**.